

TOTO®

MS874114S(G) Carlyle One Piece Toilet, 1.6 GPF




MS874114S(G) - Carlyle Toilet with SanaGloss and SoftClose Seat




G-Max Technology: Quiet, powerful, commercial grade flushing performance.



UniFit Rough-in: Easy to install, 10", 12" and 14" rough-in's available.

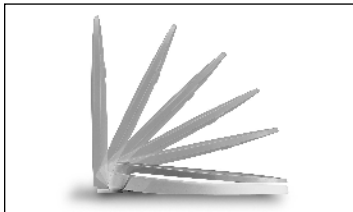

Complete with SoftClose seat, or upgrade to a Washlet®.

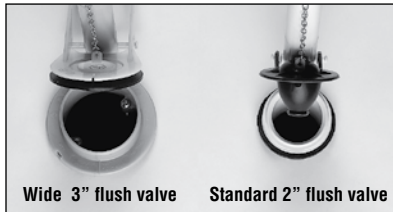

Fast Flush: New, wider 3" flush valve is 125% larger than conventional 2" flush valves.

- Streamlined, high profile one piece design
- Skirted styling with concealed trapway for easy cleaning.
- UniFit Rough-in
- SanaGloss® ceramic glaze
- G-Max Technology
- Powerful, quiet flush every time
- Large water surface

Stylish, high profile one piece toilet with 12" UniFit rough-in. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, chrome trip lever, mounting covers and SoftClose seat included.

■ MS874114S(G)

Elongated with SoftClose seat. 12" UniFit rough-in. SanaGloss Glazing. Available Colors: #01, #11, #12, #03.

■ MS874114S

Elongated with SoftClose seat. 12" UniFit rough-in. Less SanaGloss Glazing. Available Colors: #51.

□ TSU01W.10

10" UniFit rough-in: Optional.

□ TSU01W.12

12" UniFit rough-in: Supplied.

□ TSU01W.14

14" UniFit rough-in: Optional.

□ SS114

SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

Colors:

Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone

Trip Lever:

Standard Chrome

Optional See price book for additional finishes

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

MS874114S(G)

Carlyle One Piece Toilet, 1.6 GPF

■ PERFORMANCE

The TOTO G-Max low consumption toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf
 Flush System: Gravity Feed (G-Max system)
 Min. Water Pressure: 8 psi
 Water Surface: 10" x 8-1/4"
 Trap Diameter: 2-1/16"
 Rough-in: 12" (10" / 14" optional)
 Trap Seal: 2-5/8"
 Warranty: One Year Limited Warranty
 Material: Tank & Bowl: Vitreous china
 UniFit Rough-in: PVC

Shipping Weight: **MS874114S(G)** 108 lbs.


Shipping Dimension: **MS874114S(G)**
 31-1/8"L x 18-1/8"W x 27-1/8"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others

These dimensions and specifications are subject to change without notice.

U.S. Patent: 5,819,326
 5,983,413 and pending
 6,108,826

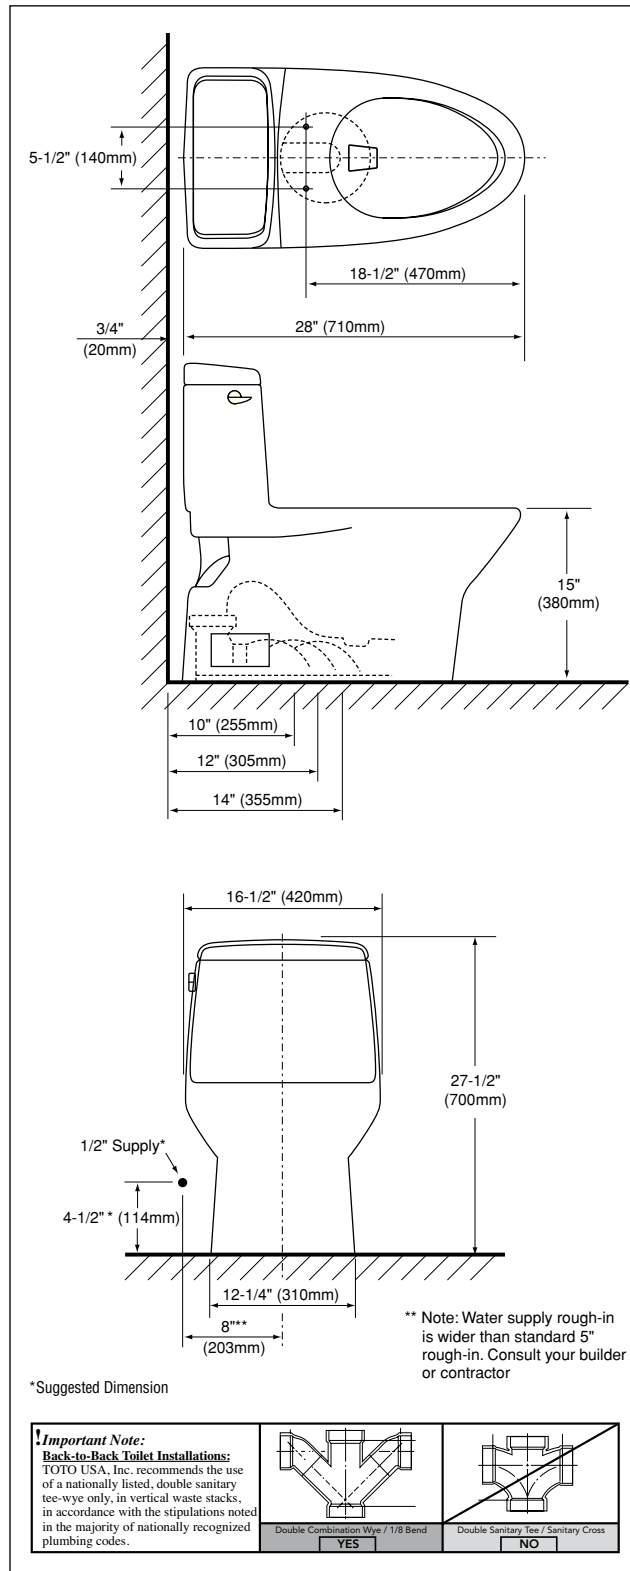

MS874114S(G) - Carlyle Toilet with SanaGloss and SoftClose Seat



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 2/01 #A10050