

# TOTO®


## CST424SF(G) Promenade Close Coupled Toilet, 1.6 GPF




CST424SF(G) - Promenade Close Coupled Toilet with SS114 - SoftClose Seat



**G-Max® Technology:** Quiet, powerful, commercial grade flushing performance.



**Choose a SoftClose® toilet seat, or upgrade to a Washlet™.**

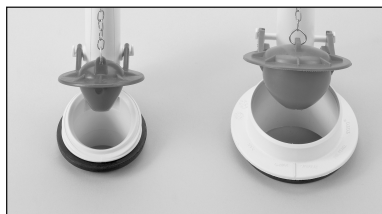

**Fast Flush:** New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Traditional design with stately lines
- Powerful and quiet flush
- Promenade design suite: Matching pedestal and self-rimming lavatories
- Large water surface
- Universal Height

High profile, elongated, close coupled toilet. Low consumption (1.6 Gpf/6.0 Lpf) gravity flushing action.

Tank cover, fittings, chrome plated trip lever less seat.

### ■ CST424SF

Elongated, 12" rough-in, less seat.

### ■ CST424SFG

Elongated, 12" rough-in, less seat. SanaGloss glazing.

### □ C424EF

Elongated front bowl only, 12" rough-in.

### □ C424EFG

Elongated front bowl only, 12" rough-in. SanaGloss glazing.

### □ ST424S

Promenade tank and cover only. Complete with tank trim and coupling components.

### □ SS114

SoftClose: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

*TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.*



**ADA Compliant**

*For installation condition with approach from the left hand side.*

#### Colors:

Standard #01 Cotton, #11 Colonial White,  
#12 Sedona Beige, #03 Bone,  
#51 Ebony

#### Trip Lever:

Standard #CP Chrome Plated  
Optional See price book for  
additional finishes

# CST424SF(G)

## Promenade Close Coupled Toilet, 1.6 GPF

### ■ PERFORMANCE

The TOTO 1.6 GPF toilet scored the highest possible rating in independent laboratory performance tests. With a powerful and quiet flush design, the toilet also offers a large water surface. Promenade toilets are designed to match the Promenade Lavatory Suite.

### ■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf  
 Flush System: Gravity Feed  
 Min. Water Pressure: 8 psi  
 Water Surface: 8-7/8" x 6-3/8"  
 Trap Diameter: 2-1/8"  
 Rough-in: 12" rough in  
 Trap Seal: 2-1/4"  
 Material: Vitreous china  
 Warranty: One Year Limited Warranty

Shipping Weight: **C424SF(G) - Bowl** 59 lbs.  
**ST424S - Tank** 41.5 lbs.

### Shipping Dimensions:

#### **C424SF(G) - Bowl**

28"L x 10"W<sup>1</sup> x 16-1/4"W<sup>2</sup> x 17-1/4"H

#### **ST424S - Tank**


20-1/2"L x 9-1/2"W x 21-3/4"H

*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.*

*Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others*

*Meets the American Disabilities Act Guidelines and ANSI A117.1. For installation condition with approach from the left hand side.*

*These dimensions and specifications are subject to change without notice.*

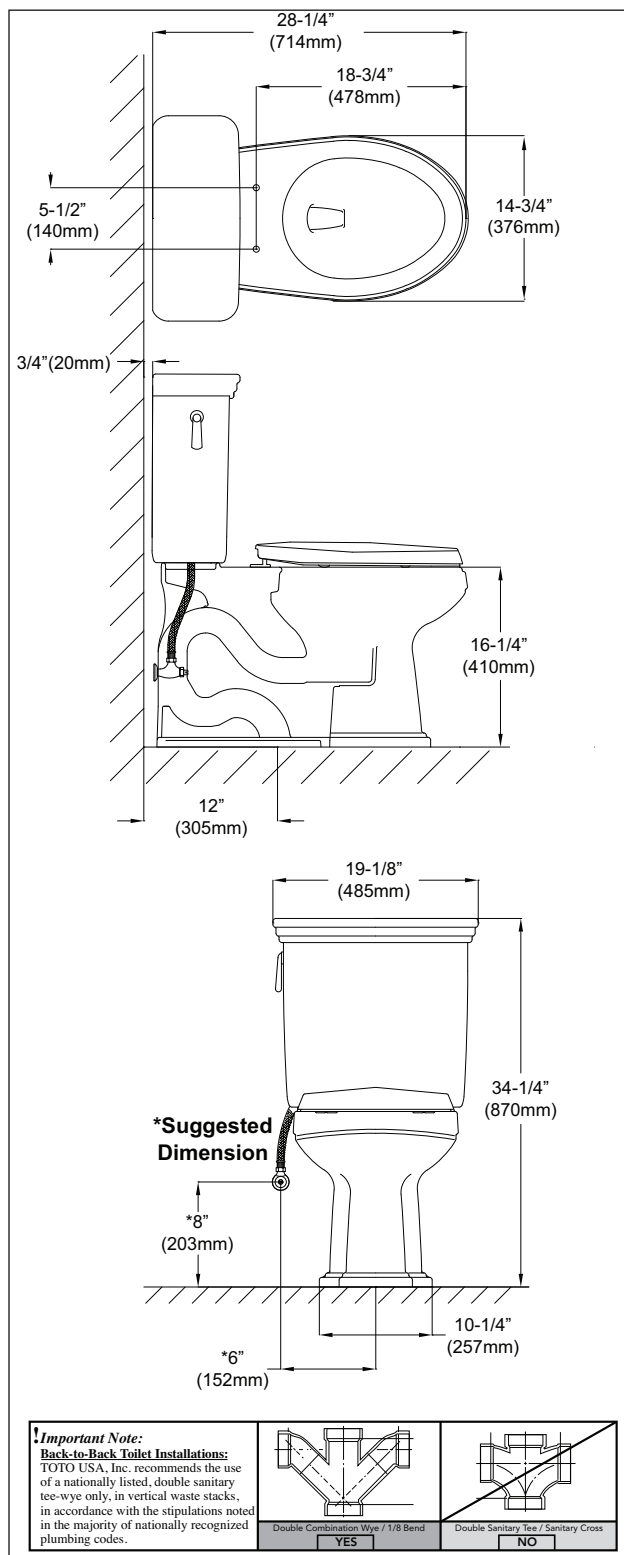

CST424SF(G) - Promenade Close Coupled Toilet

# TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • [www.totousa.com](http://www.totousa.com)

Printed in U.S.A. © TOTO LTD. 01/08 #SS-00238 v.04

Printed on recycled paper

REV 05/09