

# TOTO®


## CST464MF Aquia® III Dual Flush ADA Toilet, 1.6 GPF / 0.9 GPF



CST464MF - Aquia III Toilet  
SS204 - SoftClose® Oval Seat



Dual-Max™ Technology:  
Optional 1.6 Gpf / 6 Lpf  
or 0.9 Gpf / 3.4 Lpf



Choose a SoftClose®  
toilet seat, or  
upgrade to a Washlet™.



- Elongated skirted design, two piece toilet
- Dual-Max™ Flushing System
- Push button style flush option
- Excellent rim wash
- Large, 2-1/8" fully glazed trapway

Decorative, high profile two piece toilet. Dual Flush (1.6 Gpf / 6 Lpf & 0.9 Gpf / 3.4 Lpf) performance option to allow appropriate water usage.

Tank cover, fittings, chrome plated push button, less seat.

### ■ CST464MF

Elongated toilet bowl & tank, 12" rough-in, less seat. Universal height.

### □ CT464F

Aquia III Elongated bowl only, 12" rough-in. Universal height.

### □ ST464M

Aquia III tank and cover only. Complete with tank trim and coupling components.

### □ SS114

SoftClose® Seat: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

### □ SS204

SoftClose® Seat: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

### □ SC134

Elongated, open front seat with lid.

### □ SC534

Elongated, open front seat less lid.

#### Colors:

Standard #01 Cotton

Optional See price book for additional colors

#### Flush Button:

Standard Chrome Plated



# CST464MF

## Aquia® III Dual Flush ADA Toilet, 1.6 GPF / 0.9 GPF

### ■ PERFORMANCE

TOTO® Dual-Max™ toilets received high ratings during ANSI/ASME and CSA testing. Designed to offer optional 1.6 Gpf or 0.9 Gpf to meet the demands for water savings in growing population centers.

### ■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf  
0.9 Gpf / 3.4 Lpf

Flush System: Gravity Feed  
(Dual-Max™ System)

Min. Water Pressure: 8 psi

Water Surface: 4-1/2" x 6"

Trap Diameter: 2-1/8"

Rough-in: 12" rough-in

Acoustic Reading: 65-70dB (may vary depending on room construction)

Warranty: One Year Limited Warranty

Material: Vitreous china

Shipping Weight: **CT464F**  
78 lbs.  
**ST464M**  
30 lbs.

Shipping Dimensions: **CT464F**  
28-1/2"L x 15"W x 18"H  
**ST464M**  
16"L x 7"W x 17"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M, A112.19.14 and CAN/CSA B 45 requirements.


Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others. Watersense compliant.

Meets and exceeds ASME A112.19.2 standards for drain-line carry distance with a 2% grade and 4" I.D. pipe.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.

These dimensions and specifications are subject to change without notice.

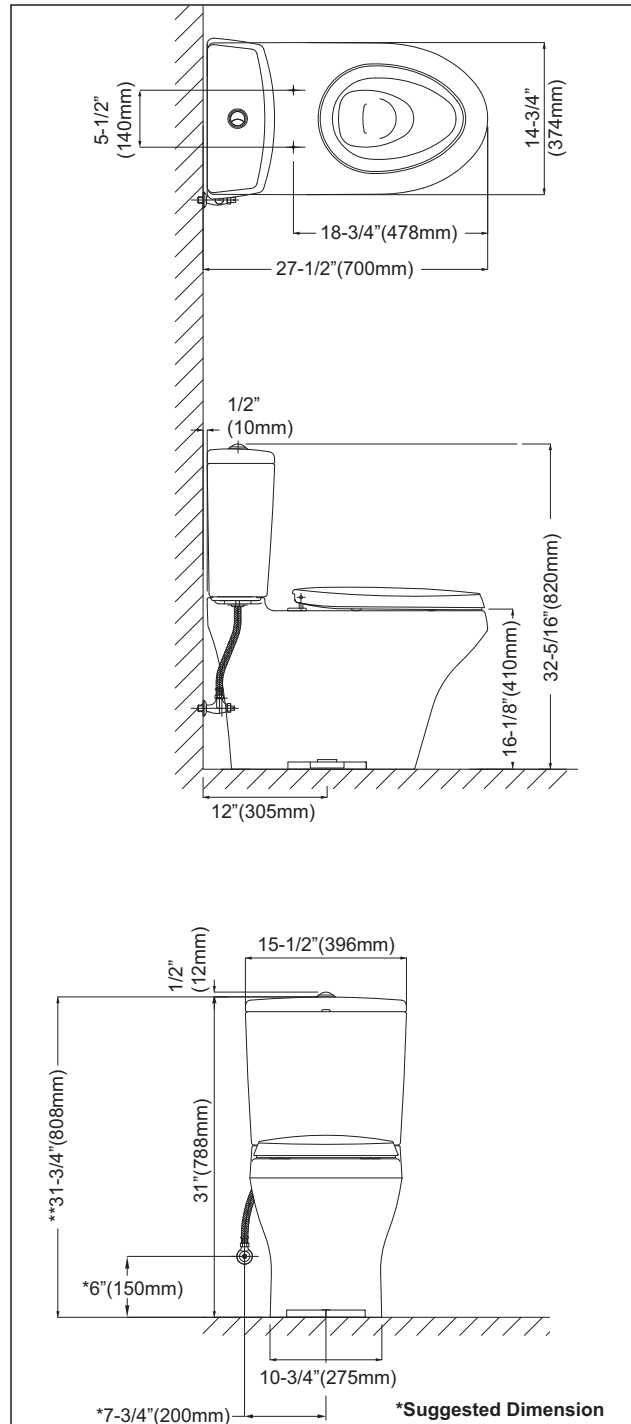

CST464MF - Aquia III ADA Toilet

# TOTO®

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260

Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com

Printed in U.S.A. © TOTO® LTD. 12/07 #A10500

Printed on recycled paper

REV 11/08