TOTO®

MS974224CEF(G)

Eco Guinevere® One Piece Toilet, Universal Height, 1.28 GPF



MS974224CEF(G) - Eco Guinevere® Universal Height Toilet with SoftClose® Seat



Double Cyclone® flushing system with maximum cleaning action for a cleaner, more hygienic toilet bowl.




UniFit Rough-in: Easy to install 10", 12" and 14" rough-in's available.



SanaGloss® glaze seals the surface, creating a finish that actually repels stains caused by buildup of mineral deposits.



Complete with SoftClose® seat, or upgrade to a Washlet®.



- Elegant one piece toilet design coordinated to match other Guinevere Suite fixtures and fittings
- Double Cyclone® Flushing System
- Universal Height for maximum comfort
- SanaGloss® ceramic glaze
- Skirted styling with concealed trapway for easy cleaning
- Clean rim design with no holes for easy cleaning
- Large water surface
- Powerful, fast, quiet flush

ADA Compliant one piece toilet. High-efficiency (4.8Lpf/1.28Gpf) Double Cyclone® flushing action.

Tank cover, fittings, polished chrome trip lever, Unifit Roughin, and SoftClose® seat included.

■ MS974224CEFG

Elongated ADA compliant toilet with SoftClose® seat (Available in: #01, #03, #11, #12)

□ MS974224CEF

Same as MS974224CFG, less SanaGloss® ceramic glaze (Available in: #51)

□ SS224

Guinevere SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ TSU03W.10

10" UniFit rough-in: Optional

☐ TSU03W.12

12" UniFit rough-in: Supplied

☐ TSU03W.14

14" UniFit rough-in: Optional

Colors:

Standard #01 Cotton, #11 Colonial White

#12 Sedona Beige, #03 Bone

#51 Ebony

Trip Lever:

Standard #CP Chrome Plated

Optional See price book for
additional information

ADA Compliant

For installation condition with approach from the left hand side.

MS974224CEF(G)

Eco Guinevere® One Piece Toilet, Universal Height, 1.28 GPF

PERFORMANCE

The TOTO® Guinevere® Toilet features the Double Cyclone® flushing system. Using two powerful nozzles, the Double Cyclone® flushing system creates a forceful centrifugal action that cleans the rim and bowl thoroughly with every flush. The rim has no holes, which makes it easier to clean and offers a seamless appearance.

SPECIFICATIONS

1.28 Gpf / 4.8 Lpf WaterUse: FlushSystem: Double Cyclone®

Min. Water Pressure:

8 psi (Static)

Water Surface: 7-7/8"x9-7/8" 2-1/8" Trap Dia.:

Rough-in:

12"(Standard)10",14"

Trap Seal: 2-3/16"

Warranty: OneYearLimitedWarranty

Material: VitreousChina

Shipping Weight: MS974224CEF(G)

120 lbs.

Shipping Dimensions:

MS974224CEF(G)

32"L x 19-7/8"W

x 29"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2, CAN/CSA B 45requirements, and LASPS for rebate program.


Listing / Approvals: C-UPC, City of Los Angeles, State of Massachusetts, and others.

Meets and exceeds ASME A112.19.2 standards for drain line carry distance with a 2% grade and 4" I.D. pipe. WaterSense compliant.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from left-handside.

These dimensions and specifications are subject to change without notice.

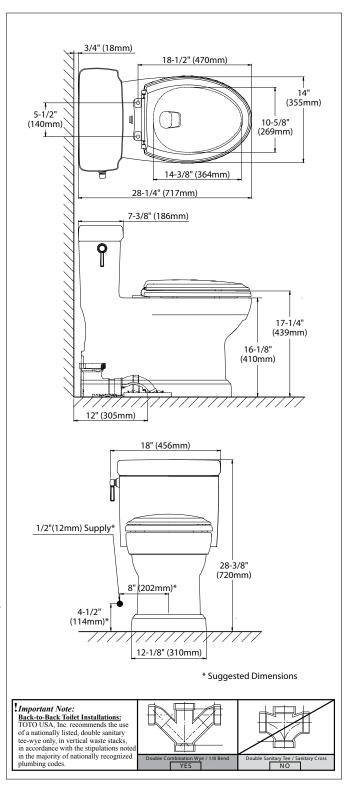

MS974224CEF(G) - EcoGuinevere® Universal Height, One-Piece Toilet

