

# CST754SF

## Dartmouth 2 Piece Toilet, Universal Height, 1.6 GPF




CST754SF - Dartmouth Toilet SS154 - Traditional SoftClose Seat



G-Max Technology: Quiet, powerful, commercial grade flushing performance.



Choose a Traditional SoftClose toilet seat, or upgrade to a Chloe or Jasmin washlet.



Choose a Traditional Fast Flush: Wide 3" flush valve is 125% larger SoftClose toilet than conventional 2" flush valves.

- Classic design, two-piece toilet.
- Universal Height 16-1/8" rim height.
- Wide 2-1/8" computer designed trapway
- G-Max Technology
- Powerful, quiet flush every time
- Large water surface

High profile ADA compliant two-piece toilet with 12" roughin. Low consumption (6 Lpf/1.6 Gpf) siphon jet flushing action.

Tank cover, fittings, color matched trip lever, less seat.

#### CST754SF

Elongated, less seat. 12" rough-in.

#### □ C754SF

Elongated front bowl only, 12" rough-in.

#### □ ST753S

Dartmouth tank and cover only. Complete with tank trim and coupling components.

#### ☐ SS154

Traditional SoftClose Seat: Traditional styled seat and lid gently close with a touch of the hand. Elongated, closed front seat with lid.

#### □ SS114

Elongated closed front toilet seat and cover with SoftClose hinge system. Mounting hardware included.



Colors:

Standard #01 Cotton
Optional See price book for

additional colors

Trip Lever:

Standard Color Matched
Optional See price book for
additional finishes

### Dartmouth 2 Piece Toilet, Universal Height, 1.6 GPF

#### PERFORMANCE

The TOTO 1.6 GPF toilet scored the highest possible rating in independent laboratory performance tests. With a powerful and quiet flush design, the toilet also offers a large water surface.

#### **■ SPECIFICATIONS**

Water Use: 6Lpf/1.6Gpf

Flush System: Gravity Feed (G-Max System)

Min. Water Pressure: 8 psi

Water Surface: 10-3/8" x 8-1/4"

Trap Diameter: 2-1/8" Rough-in: 12" Trap Seal: 2-3/8"

Warranty: Five Year Limited Warranty
Material: Tank & Bowl: Vitreous china

Shipping Weight: ST753S 39-1/2 lbs.

C754SF 56-1/2 lbs.

Shipping Dimensions: ST753S 22-1/8"L x 10"W

x 17-3/4"H

C754SF 29-1/8"L x 11-7/8"W

x 15"W<sup>2</sup>

x 17-3/8"H

Cubes: **C754SF** 3.9


ST753S 2.3

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others

Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.
Recommended seat: SS154

These dimensions and specifications are subject to change without notice.

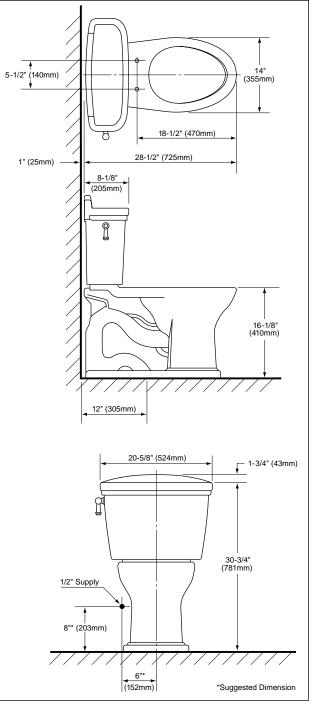

CST754SF - Dartmouth Toilet



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com Printed in U.S.A. © TOTO LTD. 10/01